



Amiga™ Whirlpool Bath


N890 Amiga™ Whirlpool Bath, Right Hand

N888 Amiga™ Whirlpool Bath, Left Hand

Amiga™ Bath


9180 Amiga™ Soaker Bath

- Right and Left Hand Drain Location
- Accessories / Hardware:
 - Rotary Drain Kit, 26" Cable: #8730
 - TheraPro Jet Trim Kit: #GU44
 - AccuPro Jet Trim Kit: #GU45 (2 kits required)
- Trim Kit Finishes Available:
 - (827) - Chrome
 - (826) - Brushed Nickel
 - (845) - Oil Rubbed Bronze

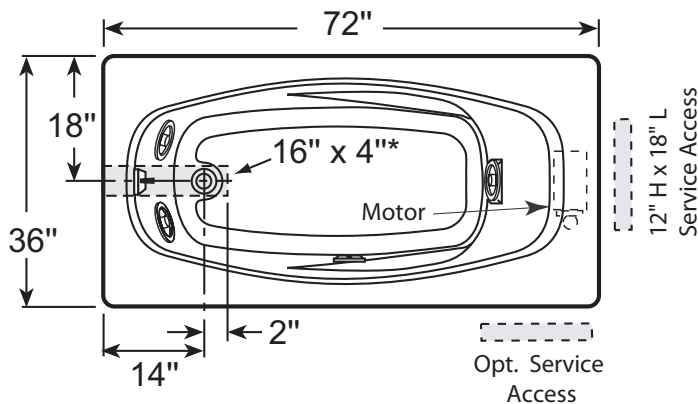


Product Shown: Amiga™ Whirlpool Bath Left Hand Shown
Model: N888


* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.

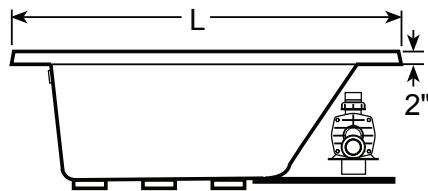

SIDE VIEW



END VIEW



DRAIN/OVERFLOW

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Electrical Components and Electrical Specifications do not apply to non-jetted baths.

Technical Specifications

DIMENSIONS

72" L x 36" W x 20-3/4" H

(1829) mm L x (914) mm W x (533) mm H

DRAIN/OVERFLOW

A: 16-7/8" (429 mm) B: 14" (356 mm)

CUTOUT

70" x 34"

TOTAL WEIGHT

N890, N888: 781 lb. (334 kg) / 43 lb/sq. ft. (209 kg/m²)

9180: 738 lb. (335 kg) / 41 lb/sq. ft. (200 kg/m²)

OPERATING GALLONAGE

Min. 42 U.S. Gal. (159 Liters)

Max. 78 U.S. Gal. (295 Liters)

PRODUCT WEIGHT

N890, N888: 105 lb. (48 kg)

9180: 71 lb. (32 kg)

SKIRT MOUNTING

Optional U-Frame: P/N F958

ELECTRICAL SPECIFICATIONS MODELS N890, N888 ONLY

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 15 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

HEATER (OPTIONAL) MODELS N890, N888 ONLY

Requires a dedicated GFCI protected separate circuit.

RapidHeat™: P/N S750000